

# BANSHEE™ Sealed Maintenance Free Battery for Motorcycle

*"IT'S NOT A BATTERY, IT'S A BANSHEE"*

## FEATURE




- High capacity ,Long life
- Sealing structure of PP materials
- High CCA and good starting performance
- Maintenance-free design
- Low self-discharge
- C.O.S Application

## 14B-BS Banshee

### SPECIFICATION


Cell per unit	6
Nominal Voltage (V)	12
Nominal Capacity (Ah)	12Ah @ 10hour rate F.V(1.75/cell)
Weight	Approx4.08kg(8.99Lbs.)
Polarity:	
Acid Volume:	828g
Charge Current :	1.2 Amps
C.C.A.-18°C:	210

DIMENSIONS	Length	Width	Height
Unit: mm	151±1	70±1	147±1
Unit: inch	5.94±0.04	2.76±0.04	5.79±0.04



## SELF DISCHARGE AND CAPACITY OF AGM BATTERIES


NOMINAL CAPACITY (%), 20hr RATE

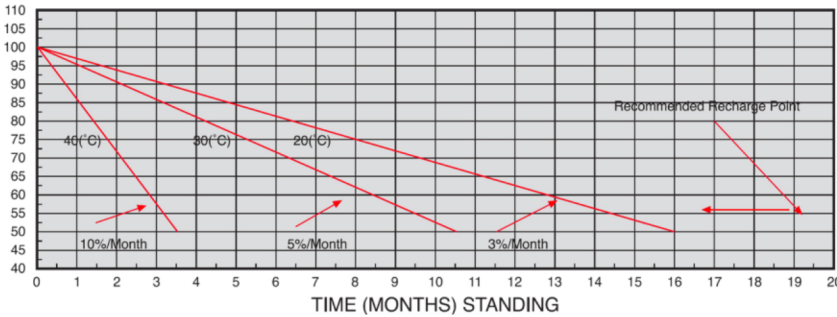

CAPACITY	VOLTAGE
100%	V > 13.0V
90%	12.80 < V < 13.00
80%	12.65 < V < 12.80
70%	12.50 < V < 12.65
60%	12.35 < V < 12.50
50%	12.20 < V < 12.35
40%	12.05 < V < 12.20
30%	11.90 < V < 12.05
20%	11.75 < V < 11.90
10%	11.60 < V < 11.75

## DISCHARGE CHARACTERISTICS

Discharge Characteristics

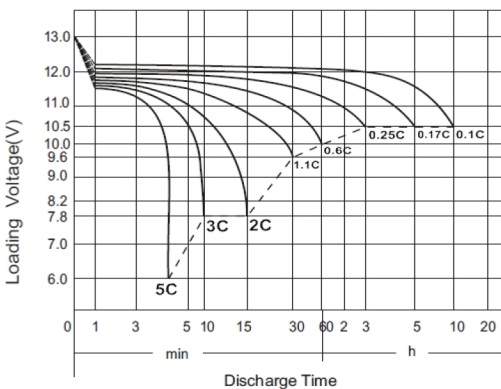

## CHARGING METHODS

CHARGING METHODS	
Full Charge	<b>Constant-Voltage Charge:</b> Initial charging current: less than 0.3C Voltage: 14.40 V ~ 15.00 V at 25°C (77 °F) Charging time: 15 ~ 18h
	<b>Constant-Current Charge:</b> Charging current: 0.1C, when charging voltage up to 14.40V, continue to charge 4h
Floating Charge	No limit on Initial charging current Voltage: 13.50 V ~ 13.80 V at 25°C (77 °F)

