

# BANSHEE™

**"IT'S NOT A BATTERY, IT'S A BANSHEE"**

## Sealed Maintenance Free Battery for Motorcycle

### FEATURES




- High capacity, Long life
- Sealing structure of PP materials
- High CCA and good starting performance
- Maintenance-free design
- Low self-discharge
- C.O.S Application

### PS-625 Banshee


#### SPECIFICATIONS

Cell per unit	6
Nominal Voltage (V)	12
Nominal Capacity (Ah)	19Ah @ 10hour rate F.V(1.75/cell)
Weight	Approx6.44kg(14.19Lbs.)
Polarity:	
Acid Volume:	1536 grams
Charge Current :	1.9 Amps
C.C.A./-18°C :	220

DIMENSIONS	Length	Width	Height
Unit: mm	177±1	101±1	157±1
Unit: inch	6.97±0.04	3.98±0.04	6.18±0.04

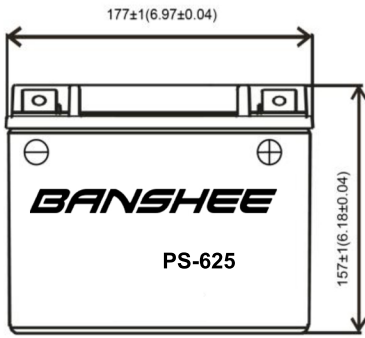


### SELF DISCHARGE AND CAPACITY OF AGM BATTERIES

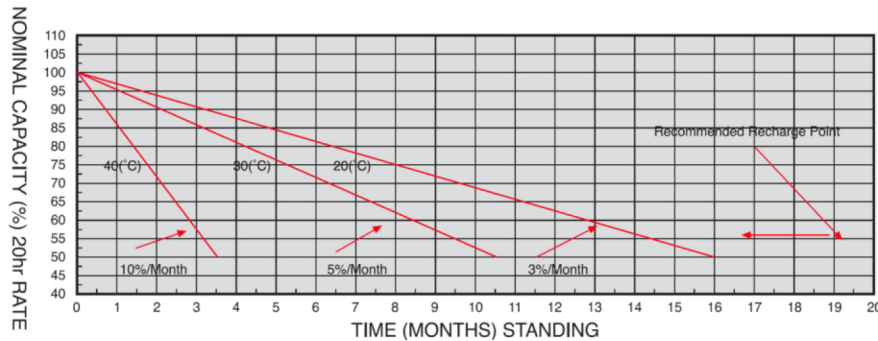

CAPACITY	VOLTAGE
100%	V > 13.0V
90%	12.80 < V < 13.00
80%	12.65 < V < 12.80
70%	12.50 < V < 12.65
60%	12.35 < V < 12.50
50%	12.20 < V < 12.35
40%	12.05 < V < 12.20
30%	11.90 < V < 12.05
20%	11.75 < V < 11.90
10%	11.60 < V < 11.75

### DISCHARGE CHARACTERISTICS

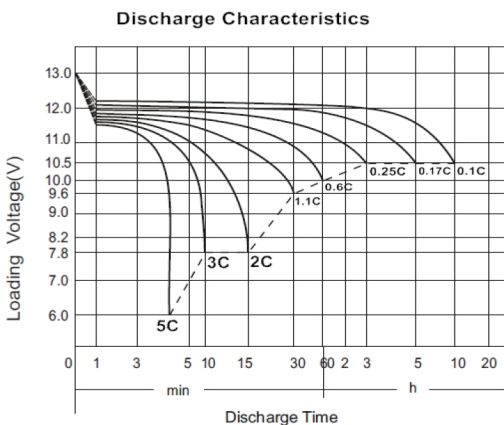

### CHARGING METHODS

CHARGING METHODS	
Full Charge	<b>Constant-Voltage Charge:</b> Initial charging current: less than 0.3C Voltage: 14.40 V ~ 15.00 V at 25°C (77 °F) Charging time: 15 ~ 18h
	<b>Constant-Current Charge:</b> Charging current: 0.1C, when charging voltage up to 14.40V, continue to charge 4h
Floating Charge	No limit on Initial charging current Voltage: 13.50 V ~ 13.80 V at 25°C (77 °F)

